



G1991 Safety Station with Eyewash, All-Stainless Steel Construction

APPLICATION: All-stainless steel combination eyewash and shower safety station. Stainless steel construction is ideal for highly corrosive environments and clean room applications. Two GS-Plus™ spray-type outlet heads deliver a flood of water for rinsing eyes.

SHOWER HEAD: 10" diameter stainless steel.

SHOWER VALVE: 1" IPS Type 316 stainless steel stay-open ball valve. Valve has stainless steel ball and Teflon® seals. Furnished with stainless steel actuating arm and 29" stainless steel pull rod.

SPRAY HEAD ASSEMBLY: Two GS-Plus™ spray heads. Each head has a "flip top" dust cover, internal flow control and filter to remove impurities from the water flow.

EYEWASH BOWL: 11 1/2" diameter stainless steel.

EYEWASH VALVE: 1/2" IPS Type 316 stainless steel stay-open ball valve. Valve has stainless steel ball and Teflon® seals.

PIPE AND FITTINGS: Schedule 40 Type 304 brushed stainless steel. Furnished with orange polyethylene covers for vertical piping for high visibility and corrosion resistance.

SUPPLY: 1 1/4" NPT female top or side inlet.

WASTE: 1 1/4" NPT female outlet.

SIGN: Furnished with ANSI-compliant identification sign.

QUALITY ASSURANCE: Valve and spray head assemblies are factory assembled and water tested prior to shipment.


Available Options

- BC** Stainless steel cover for eyewash wash bowl.
- FC20** Regulates shower flow rate to 20 GPM.
- AP275-100 ELECTRIC LIGHT AND ALARM HORN**
Light and alarm horn summon assistance when eyewash or shower is activated.
- AP250-015 MODESTY CURTAIN**
Modesty curtain for mounting on safety station.
- TMV** G3800 thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2004.





□ G1991 Safety Station with Eyewash, All-Stainless Steel Construction

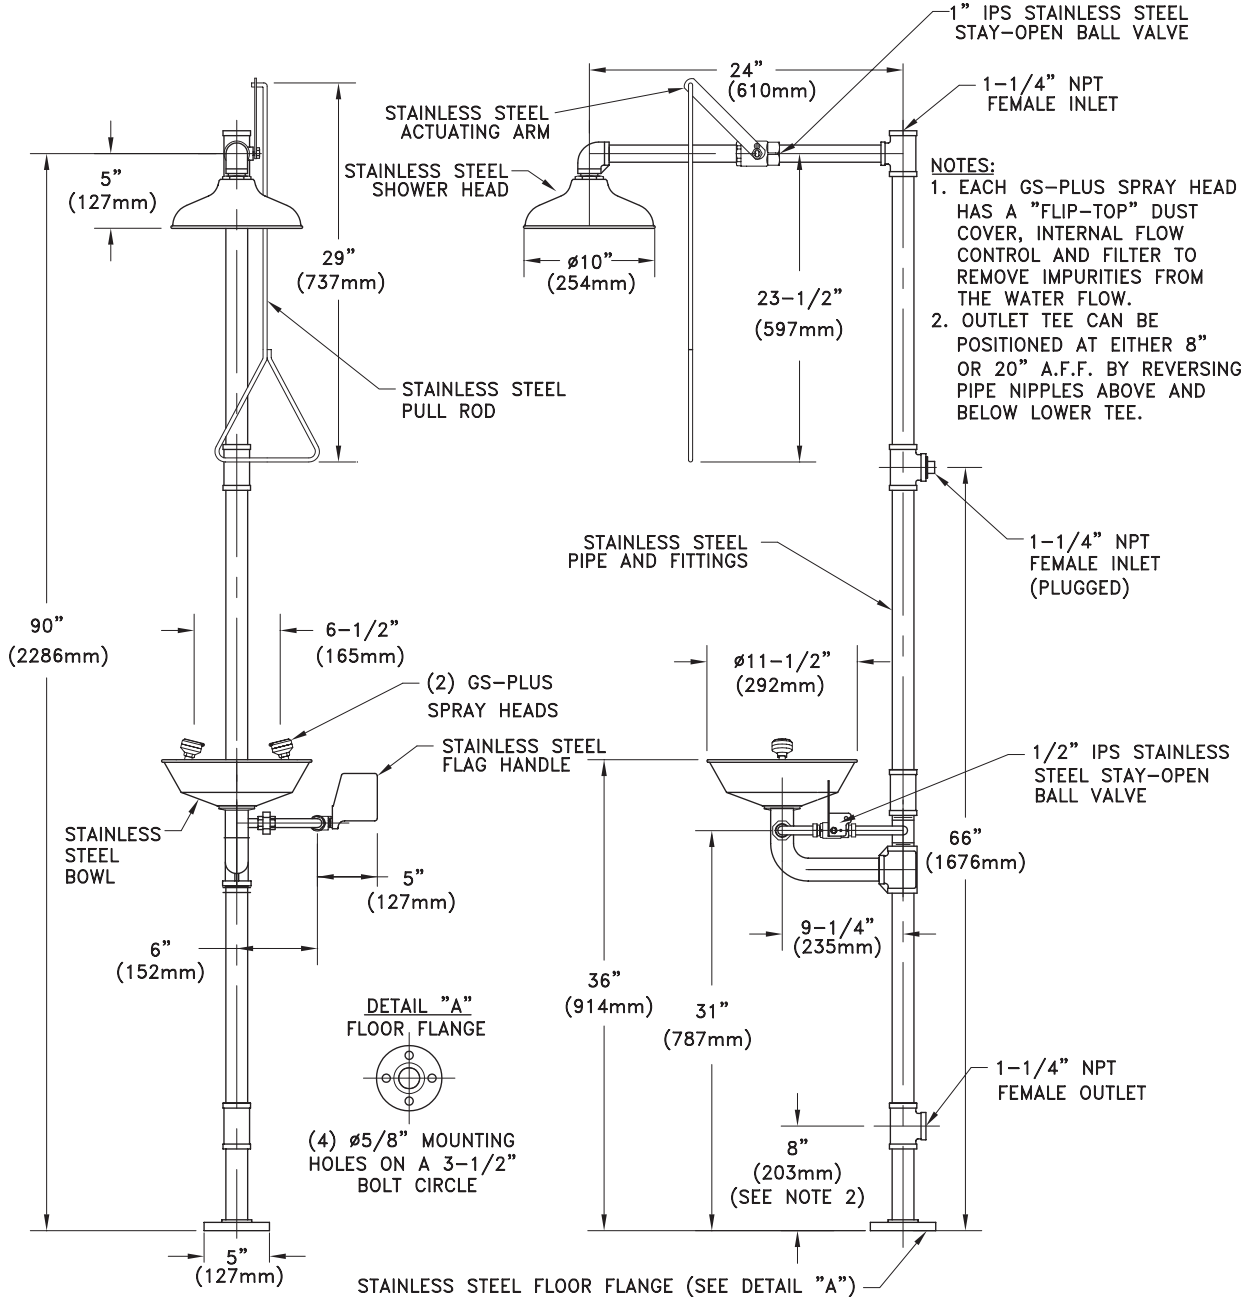

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are $\pm 1/4$ " (6mm). rev. 0308

Sign Included

