



GBF2160 Recessed Safety Station with Drain Pan, Stainless Steel Shower Head

APPLICATION: Recessed barrier-free eye/face wash and shower safety station with ceiling mounted concealed shower head and drain pan. Stainless steel cover provides attractive appearance and protects unit when not in use. When activated, cover serves as pan to collect waste water and return it into unit for drainage.

ADA COMPLIANCE: When installed at recommended mounting heights, unit complies with ADA requirements for accessibility by handicapped persons.

SHOWER HEAD: 10" diameter with flange for flush mounting in ceiling. Shower head is stainless steel.

SHOWER VALVE: 1" IPS brass stay-open ball valve with stainless steel "panic bar" actuator.

COVER/DRAIN PAN: 16 gauge stainless steel combination cover and drain pan. Grasping "panic bar" handle and opening cover pulls spray head assembly down from vertical to horizontal position, activating water flow. While unit is in operation, waste water is collected in drain pan and returned into cabinet for drainage. Unit remains in operation until cover is returned to closed position.

EYE/FACE WASH SPRAY HEAD ASSEMBLY: Two FS-Plus™ spray heads mounted on supply arms. Each spray head has individually adjustable flow control and filter to remove impurities from water.

EYE/FACE WASH VALVE: 1/2" IPS brass rotating plug-type valve. Furnished with Teflon® coated O-ring seals and in-line strainer to protect valve from debris and foreign matter.

MOUNTING: 16 gauge stainless steel cabinet with flanged rim for recessed mounting in wall. Unit fits in standard 3 5/8" deep wall.

SUPPLY: 1" NPT female inlet.

WASTE: 2" NPT female outlet.

SIGN: Furnished with ANSI-compliant identification sign.

QUALITY ASSURANCE: Unit is completely assembled and water tested prior to shipment.

NOTE: ANSI Z358.1-2004 specifies that shower heads be installed no more than 96" above the finished floor. This unit should therefore not be installed in ceilings over 8 feet. For higher ceiling heights, we recommend the GBF2150 or GBF2170 units.

U.S. PATENT 5,768,721

Available Options

- AP250-065 MODESTY CURTAIN**
- AP280-230 ELECTRIC LIGHT AND ALARM HORN**
- TMV G3800** thermostatic mixing valve.




Note: Shown with optional AP280-230 electric light and alarm horn unit (sold separately).





GBF2160 Recessed Safety Station with Drain Pan, Stainless Steel Shower Head

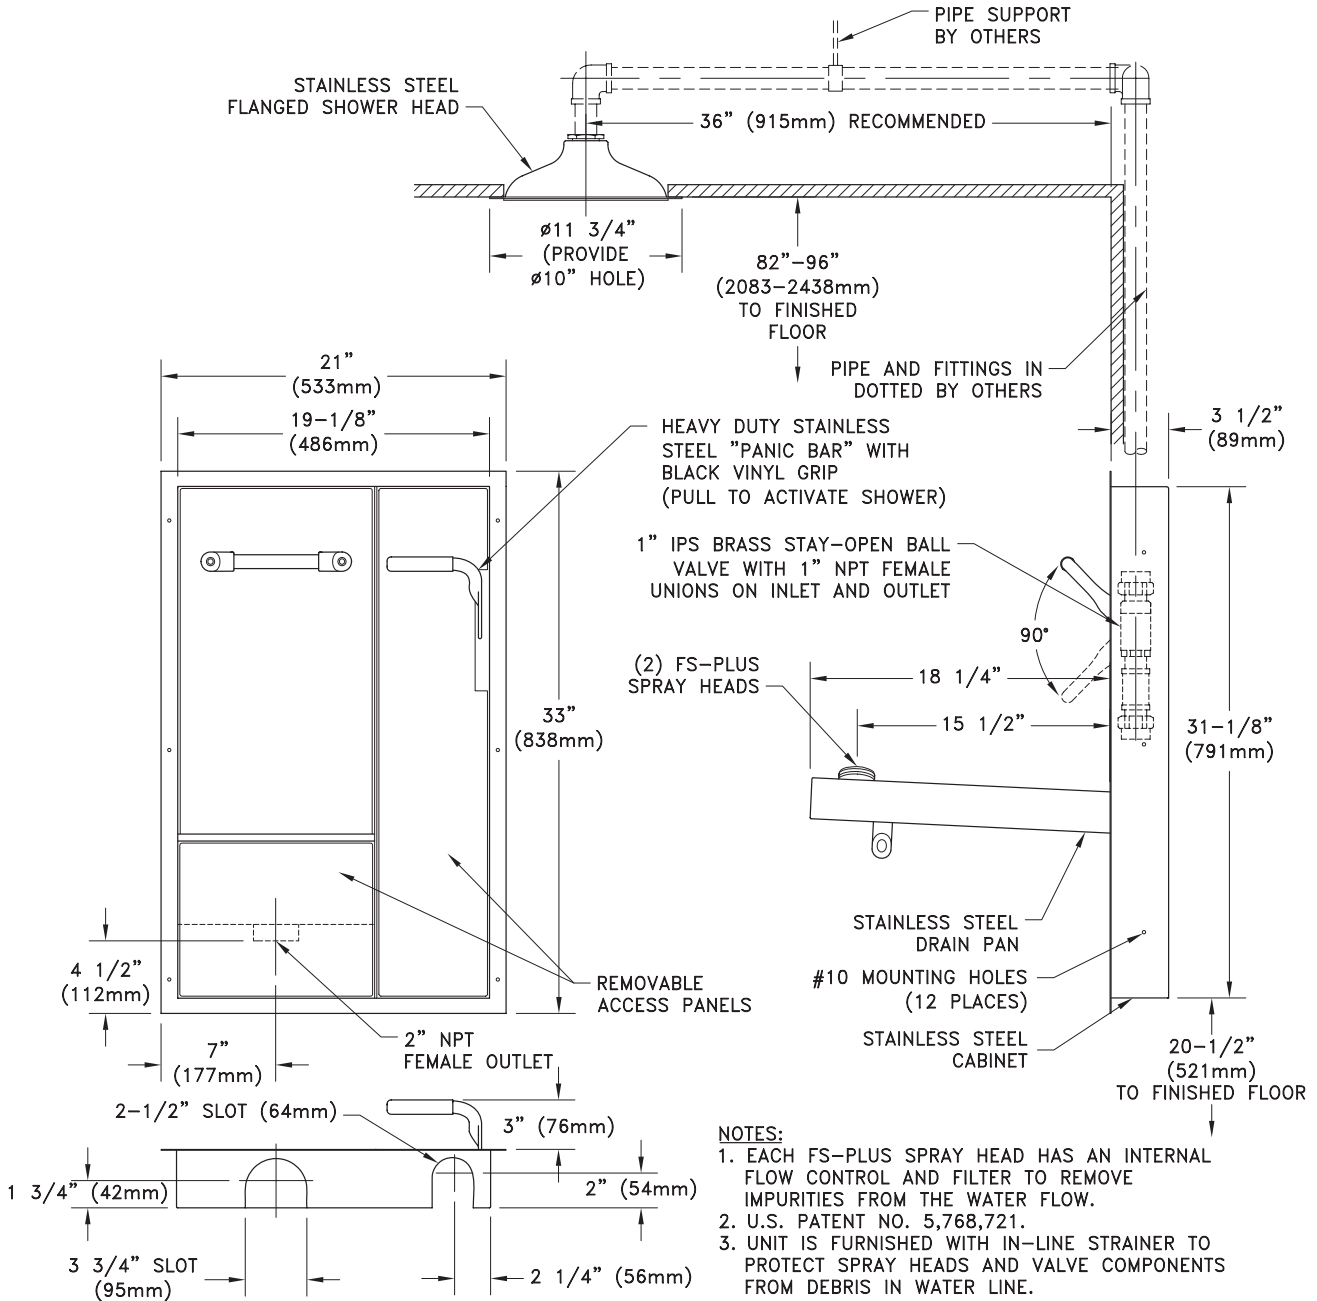

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are $\pm 1/4$ " (6mm). rev. 0308

Sign Included

