

# SPEAKMAN®

## SE-622

### COMBINATION SHOWER AND EYEWASH

#### DESCRIPTION

SE-622 Safe-T-Zone® features a combination eyewash with twin aerated sprays and a stainless steel bowl combined on a stainless steel stanchion with an impeller action deluge showerhead which is activated by a stainless steel pull rod.

#### SPECIFICATIONS

**Showerhead:** 8" diameter 300 series stainless steel

**Flow Control:** Internal 20 gpm regulator

**Valve:** 1" NPT female 300 series stainless steel.

Full flow stay open ball valve

**Activator:** 300 series stainless steel triangular pull rod

**Stanchion:** 1½" stainless steel, 18 gauge tubing

**Inlet & Waste:** 1¼" NPT male

**Performance:** 20 gpm @ 30 psi.

**Finish:** Stainless steel

#### EYEWASH: SE-505

**Bowl:** 300 series stainless steel

**Spray Heads:** (2) aerated yellow nylon spray outlets.

**Valve:** ½" NPT female stainless steel. Full flow stay open ball valve

**Activator:** 300 stainless steel push handle


**Performance:** 3.0 gpm @ 30 psi.

**Compliance:** ANSI Z358.1

**Universal Emergency Sign Included**

#### OPTIONS

- HFO Hand/Foot operation
- FPV Freeze protection valve
- SPV Scald protection valve
- FLW Flow switch
- HS Hand-held spray
- TS Top supply

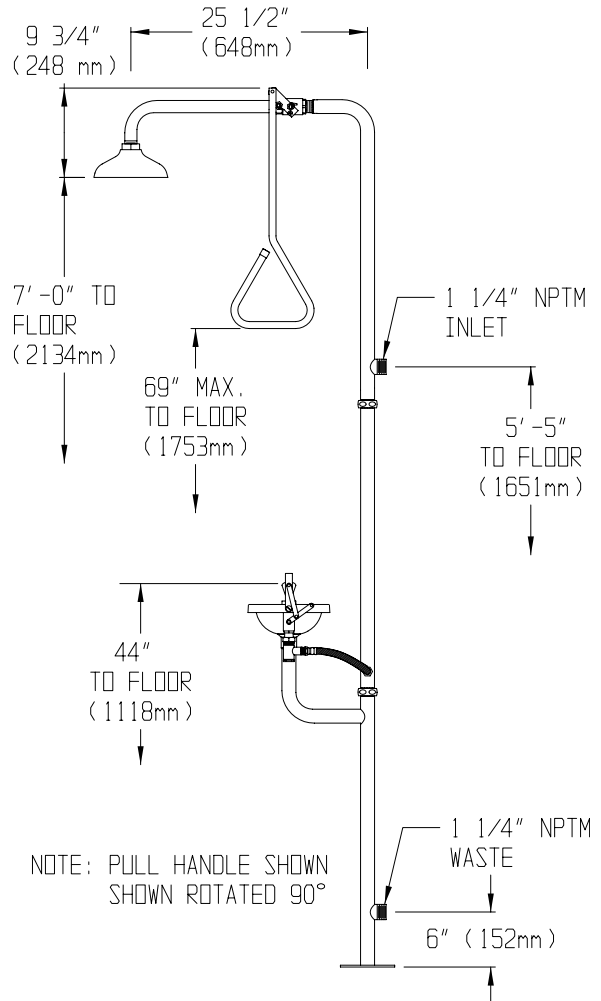

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____