

# SPEAKMAN®

## SE-675

### COMBINATION SHOWER AND EYE/FACE WASH

#### DESCRIPTION

SE-675 Safe-T-Zone® features an eye/face wash with dual spray outlets, flip top dust caps combined on a powder coated galvanized steel stanchion with an impeller action deluge showerhead that is activated by a high visibility yellow pull rod.

#### SPECIFICATIONS

**Showerhead:** 8" Cylolac® yellow plastic

**Flow Control:** Internal 20 gpm restrictor

**Valve:** 1" NPT female brass, chrome-plated, full flow stay-open ball valve

**Activator:** Powder coated yellow, aluminum triangular pull rod

**Stanchion:** 1¼" IPS galvanized steel piping with brass fittings

**Inlet:** 1¼" NPT female

**Finish:** Dura Jade powder coated finish

**Performance:** 20 gpm @ 20 psi

**EYE/FACE WASH: SE-575**

**Spray Heads:** (2) yellow ABS plastic spray outlets with flip-top dust caps

**Valve:** ½" NPT female brass, chrome-plated, full flow stay-open ball valve

**Activator:** Stainless steel push handle

**Inlet:** ½" NPT male


**Performance:** 3.8 gpm @ 30 psi

**Compliance:** ANSI Z358.1

**Universal Emergency Sign Included**

#### OPTIONS

- HFO Hand & foot operation
- FPV Anti-freeze protection valve
- SPV Anti-scald protection valve
- FLW Flow switch
- HS Hand-held spray
- TS Top supply
- SSH Stainless steel showerhead
- SPR Stainless steel pull rod
- SSBV Stainless steel ball valves
- BH Brass showerhead

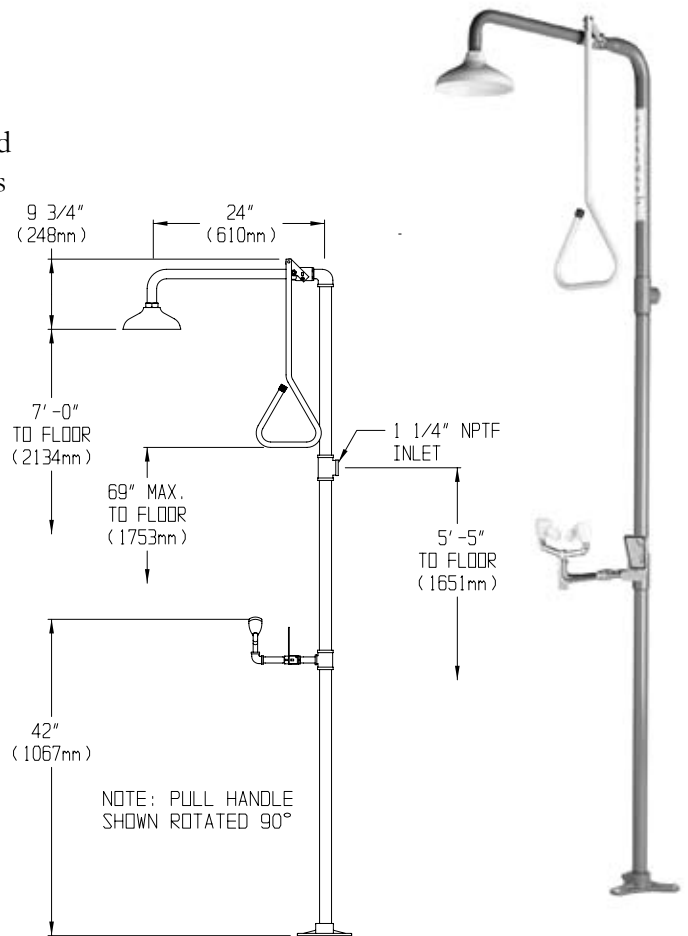

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____